

RESEARCH ARTICLE

Comparing the risk of low-back injury using model-based optimization: improved technique vs. exoskeleton assistance

Giorgos Marinou^{1*}, Matthew Millard¹, Nejc Šarabon² and Katja Mombaur³

¹Optimization, Robotics and Biomechanics (ORB), Institute of Computer Engineering (ZITI), Heidelberg University, Heidelberg, Germany. ²Faculty of Health Sciences, University of Primorska, Izola, Slovenia. ³Canada Excellence Research Chair in Human-Centred Robotics and Machine Intelligence, Systems Design Engineering & Mechanical and Mechatronics Engineering, University of Waterloo, Waterloo, Canada.

*Corresponding author. E-mail: giorgos.marinou@ziti.uni-heidelberg.de

(Received xx xxx xxxx)

Keywords: low back pain; optimal control; wearable robotics; back-support exoskeletons; model-based optimization

Abstract

Although wearable robotic systems are designed to reduce the risk of low back injury, it is unclear how effective assistance is compared to improvements in lifting technique. We use a two factor block study design to simulate how effective exoskeleton assistance and technical improvements are at reducing the risk of low back injury when compared to a typical adult lifting a box. The effects of assistance are examined by simulating two different models: a model of just the human participant, and a model of the human participant wearing the SPEXOR exoskeleton. The effects of lifting technique are investigated by formulating two different types of optimal control problems (OCPs): a least-squares problem (LSQ) which tracks the human participant's lifting technique; and a minimization problem where the model is free to use a different movement. Different lifting techniques are considered using three different cost functions related to risk factors for low-back injury: cumulative-low-back-load (CLBL), peak-low-back-load (PLBL), and a combination of both CLBL and PLBL (HYB). The results of our simulations indicate that an exoskeleton alone can make modest reductions in both CLBL and PLBL. In contrast, technical improvements alone are effective at reducing CLBL, but not PLBL. The largest reductions in both CLBL and PLBL occur when both an exoskeleton and technical improvements are used. While all three of the lifting technique cost functions reduce both CLBL and PLBL, the HYB cost function offers the most balanced reduction in both CLBL and PLBL.

Impact Statement

Injury to the low back is common among workers, painful to individuals, and costly to society as a whole. Two risk factors associated with low-back injury are the cumulative low back load (CLBL), and the peak low back load (PLBL). In this work, we use simulation and a two factor block study design to examine how much the risk of low-back injury is affected by an exoskeleton and improvements to lifting technique. Our simulations indicate that training alone can substantially reduce CLBL, but only modestly reduce PLBL. When both training and an assistive exoskeleton are used, our simulations indicate that both risk factors can be substantially reduced.

1. Introduction

Low-back pain (LBP) accounts for approximately 15.5% of worker absenteeism in industry across Europe and North America (Wynne-Jones et al., 2014), while being globally the first ranked disorder

for years lived with disability (Buchbinder et al. 2013). Assistive exoskeletons and more specifically, back-support exoskeletons, are being developed for the prevention of LBP by alleviating low back loads. There exists a variety of passive exoskeletons such as Laevo (Laevo, 2018; Hensel and Keil, 2019), PLAD (Abdoli et al., 2006), SuitX (Kazerooni et al., 2019), Moment Restoring Device (Wehner et al., 2010) and BNDR (Ulrey and Fathallah, 2013). There are a similar number of active exoskeletons such as the Robomate (Toxiri et al., 2018, Huysamen et al., 2018), WSAD (Luo and Yu, 2013) and the Muscle Suit (Muramatsu et al., 2014). In many cases, these devices manage to lower joint torques and muscle activity (de Looze et al. 2016). Although many exoskeletons are focused at reducing the risk of low-back injury, it is not clear how effective these devices are in comparison to simply improving lifting technique.

Repetitive lifting and bending tasks contribute most to LBP (Coenen et al. 2013). Repetitive lifting causes the accumulation of microdamage to the tissue through cumulative low-back loads (CLBL) (Brereton and McGill, 1999). Apart from CLBL, instantaneous damage can be caused to the lower back by peak low-back loads (PLBL). Both of these quantities are typically highest at the L5/S1 lumbosacral joint (Coenen et al., 2014). Risk factors based on the L5/S1 extension moment (such as CLBL and PLBL) are both easy to calculate and capture the risk associated with many different specific injuries because the loads applied to the ligaments, disks, vertebrae, and muscles of the back scale with the L5/S1 extension moment (van Dieen and Kingma, 2005).

Even though there has been a lot of modelling and simulation work done to learn more about back injury (Christophy et al., 2012, McGill et al., 1987, de Zee et al., 2007), much of this work is based on inverse-dynamics data taken from real people lifting, and therefore cannot predict how someone might use a novel exoskeleton. The few optimal control studies that have been done to predict new lifting motions (Xiang et al., 2020), do not combine human and exoskeleton models. The limited amount of work that includes an exoskeleton (Harant et al., 2019, Millard et al., 2017), however, does not consider the effects of training, nor risk factors related to low-back injury. Additionally, no simulation work has been found that examines the effect of lifting technique on the risk of low-back injury.

In this work, we employ optimal control and multi-body dynamics to model, simulate, and predict the movements and forces needed for a person to lift a 10 kg box from the floor. Using motion capture data of an experimental participant lifting a 10 kg box from the floor, we recreate the motion using a least-squares fitting approach. We then add the exoskeleton model and re-evaluate the least-squares problem in order to quantify the effect of adding an exoskeleton without changing the original motion. Next, we examine how much CLBL and PLBL can be reduced through improved lifting technique, with the use of an exoskeleton and lastly with the use of an exoskeleton plus improved lifting technique. In this study, we use a movement between a stoop and a squat (stoop-squat) since this technique is most often used when picking up objects from the ground (Burgess-Limerick et al., 1995). We extend our previous work (Marinou and Mombaur, 2020) by simulating the effects of two different conditions in our simulations: lifting using experimentally measured technique vs. lifting with optimal lifting technique; and lifting without any aids vs. lifting with the assistance of an exoskeleton. We evaluate three different optimal lifting techniques that minimize three different risk factors for lifting: (a) CLBL, (b) PLBL, and a weighted sum of both CLBL and PLBL (HYB). We evaluate the effects of assistance by simulating the lift using two different models: a model of our human participant, and a model of our human participant wearing the SPEXOR exoskeleton. We hypothesize that both the lifting technique alone and with the exoskeleton will reduce CLBL and PLBL, but that the exoskeleton will provide the greatest reduction in injury risk.

2. Methods

We simulate eight different stoop-squat lifts of a 10 kg box in the sagittal plane using a planar multibody model. We create a reference solution using a least-squares fitting problem (Fig. 1 (B)), where we track the motion of one participant from the recorded motion capture data. To examine how much an

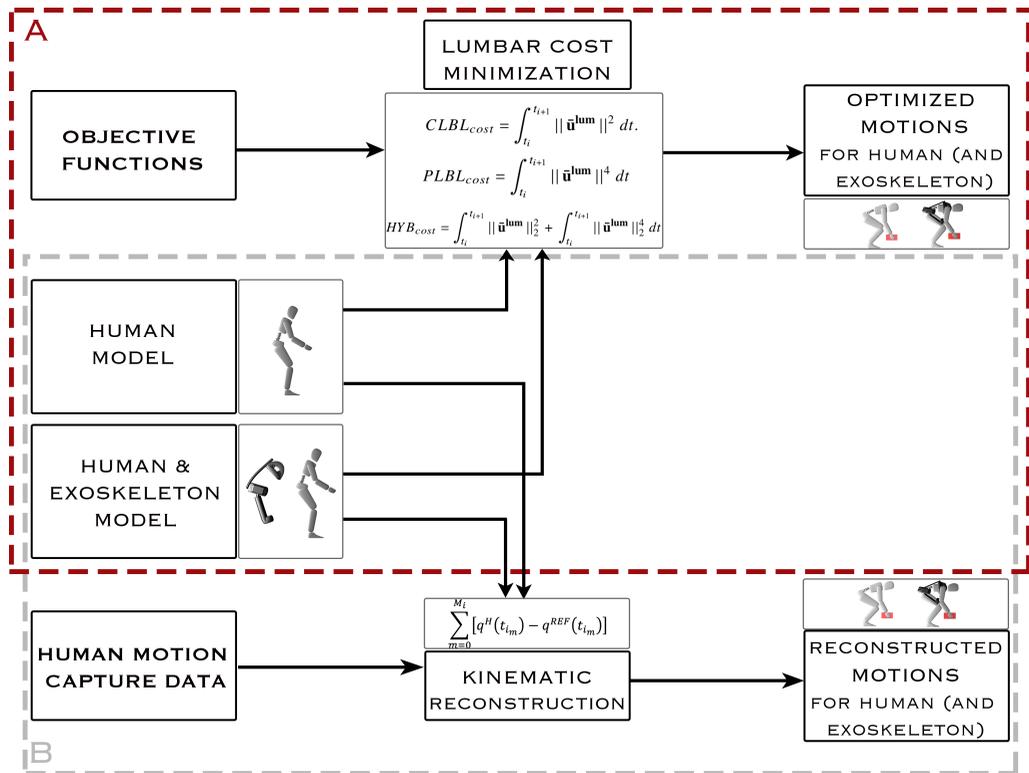


Figure 1. Two optimization methods: **A** - prediction through optimization of human-only and human-with-exoskeleton stoop-squat lifts, **B** - dynamic reconstruction of human-recorded stoop-squat lifts for both human-only and human-with-exoskeleton OCPs based only on human capture data.

exoskeleton reduces the risk of injury using the same lifting technique we solve the same least-squares fitting problem but using a model that includes the exoskeleton. The remaining six of the lifts are completely synthesized and rely on no experimental data (Fig. 1 (A)). To examine the effect of lifting technique we create three different cost functions: one for minimizing CLBL, one for minimizing PLBL and lastly a hybrid function minimizing both CLBL and PLBL. The following sections describe our modeling procedure, the optimal control problem (OCP) formulation, and the evaluation of the cost functions employed.

2.1. Experimental Data

A male participant of 76.5 kg mass and height of 1.69 m performed a stoop-squat lift of a 10 kg box. Kinematics of the body segments and the box were recorded by recording the position of markers on the participant and the box, using an OptoTrack system (Northern Digital Inc., Canada). Ground reaction forces were collected using Kistler force plates (model 9260AA6 from Kistler, Winterthur, Switzerland). The experiment was conducted at the University of Primorska in Slovenia and approved by the national medical ethics committee of the Republic of Slovenia (0120-199/2016-2, KME 93/04/16) with written and informed consent from the participant. The data was collected for the human alone, without the aid of the exoskeleton.

2.2. Dynamics

We have modelled the human body in the sagittal plane using an 11 segment model with 13 degree-of-freedom (DOF), the exoskeleton with 6 segments and 8 DOF, and the box with one segment and 3 DOF. Accordingly, the generalized position vector contains 3 entries for the box, and 13 entries for the human model. When the exoskeleton is included, an 8 additional entries are added for the exoskeleton model. The geometry, masses, and inertias of the segments in the human model have been scaled using de Leva's 1996 anthropomorphic tables and the participant's height and mass. The mass and geometry properties of the box and the exoskeleton have been set to match the physical box used in the experiment and the SPEXOR exoskeleton (Naf et al., 2018).

The system is modeled as a constrained multibody system,

$$M(\mathbf{q})\ddot{\mathbf{q}} + c(\mathbf{q}, \dot{\mathbf{q}}) = \tau + G(\mathbf{q})^T \lambda \quad (1)$$

where G is the Jacobian of the kinematic constraint equations

$$g(\mathbf{q}, \dot{\mathbf{q}}) = 0, \quad (2)$$

and \mathbf{q} , $\dot{\mathbf{q}}$ and $\ddot{\mathbf{q}}$ are the generalized vectors for position, velocity and acceleration of the model's segments. $M(\mathbf{q})$ is the mass matrix of the system and $c(\mathbf{q}, \dot{\mathbf{q}})$ is the vector of Coriolis and centripetal forces. Equation 2 describes the kinematic constraints which consists of the coupling equations for the lumbar spine (Christophy et al., 2012), the contact constraints between the foot and the ground, the contact constraints between the hands and the box, and the constraints that attach the exoskeleton to the human body model. The entries contained in $G(\mathbf{q})^T \lambda$ are the generalized forces imposed by these constraints, where $G(\mathbf{q})$ is the Jacobian of the constraint equations $g(\mathbf{q})$ with respect to \mathbf{q} , and λ is a vector of Lagrange multipliers. Finally, τ is the vector of generalized force applied to the system, which consists of the joint torques developed at the internal joints of the human model and the hip actuator of the exoskeleton (Fig. 2).

In describing the interaction between the human and the exoskeleton, we simulate the exoskeleton as an external rigid body which is attached to the human through 8 kinematic constraints defined at three attachment points: the thigh, pelvis and upper trunk. The thigh and upper trunk modules of the exoskeleton are attached to the human model using weld constraints. A point constraint is used to attach the pelvis module of the exoskeleton to the pelvis, which permits rotation between these two bodies. Weld constraints are applied between the human feet and the ground, as well as the hands and the box during the contact and lifting phases. To simulate this constrained system forward in time we use the Rigid Body Dynamics Library (RBDL) of Felis 2017.

2.3. Lumbar Spine Model

We have included an articulated and coupled model of the lumbar spine similar to Christophy et al. 2012 to ensure that the bending movements of the model are as accurate as possible. In this model, the lumbar spine is described as 5 vertebrae attached serially using revolute joints. The revolute joints of the lumbar back are located at the average center-of-rotation of each vertebra as reported by Pearcy and Bogduk 1988. We have fit the data of Pearcy and Bogduk 1988 to the high resolution vertebral meshes of Mitsuhashi et al. 2009, and scaled the model to fit our participant. All internal joints of the human model are torque-driven.

Although the lumbar spine has five joints, we have coupled those joints with four constraint equations so that the entire lumbar spine has only one degree of freedom in the sagittal plane. The constraint equations have been formulated so that the resulting coordinated motion is consistent with the coordinated bending of the lower back as measured by Wong et al. 2006. Wong et al. 2006 observed that the flexion of each joint, α_i , scales linearly with the total lumbar flexion angle, $\alpha_L = \sum_{i=1}^5 \alpha_i$, such that $\alpha_i = n_i \alpha_L$, where α_5 corresponds to the angle from the S1 to L5, and α_4 corresponds to the angle

from L5 to L4, etc. The coefficients n_5, \dots, n_1 that best fit the 30 participants in Wong et al.'s 2006 study are 0.255, 0.231, 0.204, 0.185, and 0.125. Similar to Christophy et al. 2012, we use the linear relationship between α_i and α_L to form the velocity-level constraint

$$c_i : \frac{\dot{\alpha}_i}{n_i} - \frac{\dot{\alpha}_{i+1}}{n_{i+1}} = 0 \quad (3)$$

between neighboring pairs of joints (Fig. 2). Prior to simulation, each lumbar joint angle is biased so that a lumbar flexion angle of zero, $\alpha_L = 0$, poses the lumbar spine to match the resting position (shown in Fig. 2) of the participant from Mitsuhashi et al. 2009. In this case, the bias angles are 2.1°, 8.8°, 10.6°, 12.9°, and 11.3° of extension for the joints from L5/S1 joint to the L1/L2 joint, respectively. As with other kinematic constraints in this model, index reduction is used to transform the original set of differential algebraic equations of index 3 to a system of differential algebraic equations of index 1. During the simulation, the constraint error is reduced using the stabilization of Baumgarte 1972.

2.4. Exoskeleton Model

We model the SPEXOR exoskeleton using an 8 DOF mechanism composed of 6 segments and a total mass of 9.12 kg. Unique to this exoskeleton are three carbon fibre rods (4.7 mm in diameter, with a Young's modulus of 166 GPa) producing counter torques about the lumbar in order to support lifting motions. Additionally, a hydraulic actuator (with a maximum output torque of 25 Nm) is placed at the exoskeleton hip joints, which feature a misalignment compensation mechanism (Fig. 2). The exoskeleton further includes a trunk and pelvis module which are connected by carbon fibre beams, and two thigh modules that are connected to the pelvis interface by a rigid metal rod on each side. The beams are rigidly fixed to the pelvis module and pass through the torso module via a series of rollers.

We model the path traced by the slender beams using a cubic spline. As has been shown by Holladay (1957) a cubic spline traces a path that minimizes total curvature, which is the same path traced by a slender elastic beam. At every instant in time a cubic spline $w(u)$ is fitted to match the end conditions imposed by the rigid pelvis mount and the rollers (Fig. 2). We describe the spline in normalized coordinates

$$u = \frac{z}{L} \quad (4)$$

along the undeformed path of the beam, and by deflections

$$w(u) = A + Bu + Cu^2 + Du^3 \quad (5)$$

perpendicular to u . Here L is the distance between the pelvis mount and the rollers projected onto the beam's axis that is fixed to the pelvis module. The coefficients in Eqn. 5 are evaluated using the boundary conditions imposed by the rigid pelvis mount

$$w(0) = \frac{dw(0)}{du} = 0 \quad (6)$$

and the boundary conditions imposed by the rollers on the torso module where the beam must deflect by Δ

$$w(1) = \Delta, \quad (7)$$

and

$$\frac{d^2 w(1)}{du^2} = 0 \quad (8)$$

since the rollers cannot apply a reaction moment. The moments and shear forces the slender bent beam applies to the pelvis ($z = 0$) and torso ($z = L$) modules are evaluated using the spline $w(u)$ and an

Euler-Bernoulli beam model where

$$M(u) = -EI \frac{d^2 w(u)}{du^2} \left(\frac{du}{dz} \right)^2 \quad (9)$$

and

$$S(u) = -EI \frac{d^3 w(u)}{du^3} \left(\frac{du}{dz} \right)^3. \quad (10)$$

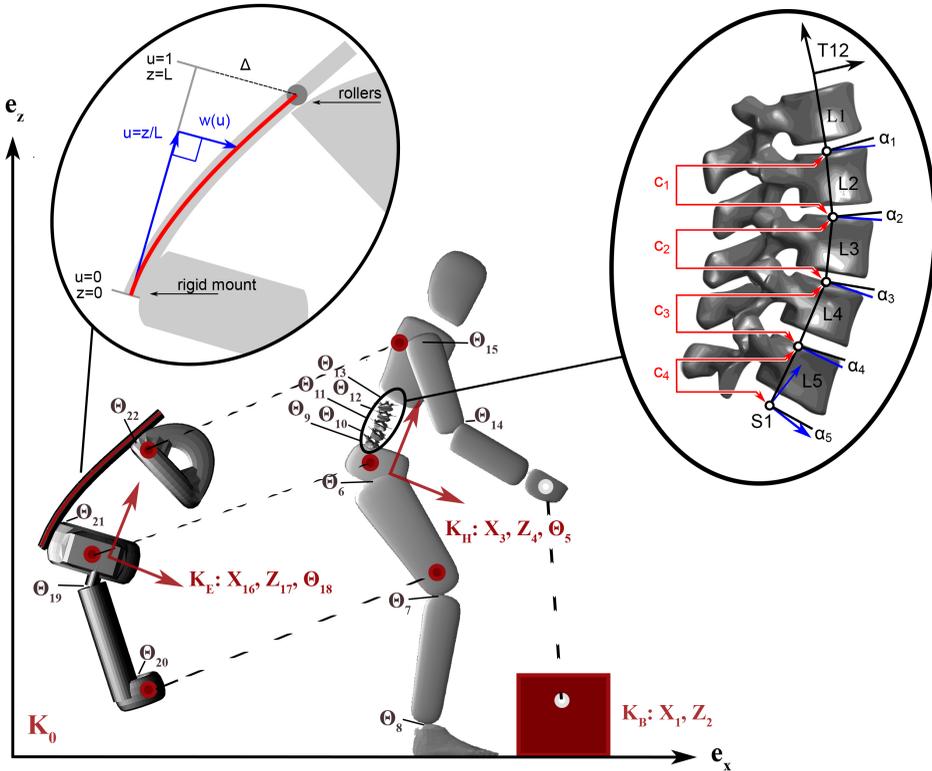


Figure 2. The human as an 11-segment, 13-DOF model and the attachment points to the 6-segment, 8-DOF exoskeleton. Dashed lines indicate the kinematic constraints between the exoskeleton and the human, as well as the human and the box. The feet are constrained to the ground throughout the motion whereas the box is constrained to the ground until lifted by the human. The letter K denotes a coordinate system where the subscripts B , H , E and 0 correspond to the coordinate systems of the box, human, exoskeleton and global reference frames, respectively. The planar positions are indicated with x and z and angles by Θ . A close-up of the lumbar spine model depicts the L1 to L5 lumbar vertebrae and the four constraint equations that couple the movements of the joints. Each disk is approximated as a spherical joint located at the center-of-rotation identified by Percy and Bogduk 1988 from radiographic data. We have scaled the center-of-rotation of each vertebrae to fit the high resolution meshes of the lumbar vertebrae of Mitsuhashi et al. 2009.

2.5. Optimal Control Problem Formulation

We divide the task of lifting a box from the floor into three phases for both human-only and human-with-exoskeleton OCPs (Fig. 3): first, the model moved from a standing phase to touching the box; second, the model applies force to the box until the full weight of the box is supported; finally, the model lifts the box and stands back up again. We use a series of constraints to ensure that contact forces are physically realistic and the beginning and end poses are comparable. The forces in the global \mathbf{e}_z direction are constrained to be positive, while friction forces must be within the friction cone. Similarly, tangential forces between the hands and the box are also constrained to be within the friction cone, as

would be case if the lift is being performed with an open grip. Finally, we constrain the model to begin and end the lift at rest and in the same starting and ending pose as the human participant.

For the simulations that include an exoskeleton, we have additional constraints to limit the interaction forces between the human and the exoskeleton. We solve both problems using a direct multiple-shooting algorithm implemented in MUSCOD-II (Bock et. al., 1985, Leineweber et al., 2003).

In this work we formulate a multiphase optimal control problem that minimizes the Lagrange term

$$\min_{x,u,p} \sum_{i=0}^{N-1} \left(\int_{t_i}^{t_{i+1}} \Phi_i(\mathbf{x}(t), \mathbf{u}(t), \mathbf{p}) dt \right) \quad (11)$$

which includes the control vector $u(t)$ which is composed of the joint torques of the human model and the actuator control signal of the exoskeleton, and the state variables vector $x(t)$ which contains the positions and velocities of the multibody system segments. The vector p stands for physical parameters such as exoskeleton and i iterates through the multiple phases of the problem through time t from t_o to t_N . The dynamics of the systems (Equations 1 & 2) take the form of ordinary differential equations

$$f_i(x(t), u(t), p) = \dot{x} \quad (12)$$

that are limited by equality and inequality constraints

$$r_{eq}(x(t_o), u(t_o), \dots, x(t_N), u(t_N), p) = 0 \quad (13)$$

$$r_{ineq}(x(t_o), u(t_o), \dots, x(t_N), u(t_N), p) \geq 0, \quad (14)$$

at specific time points throughout the separate phases. The time vector is broken up into N consecutive time intervals

$$t \in [t_i, t_{i+1}], i = 0, \dots, N - 1 \text{ and } t_o < t_1 < \dots < t_N \quad (15)$$

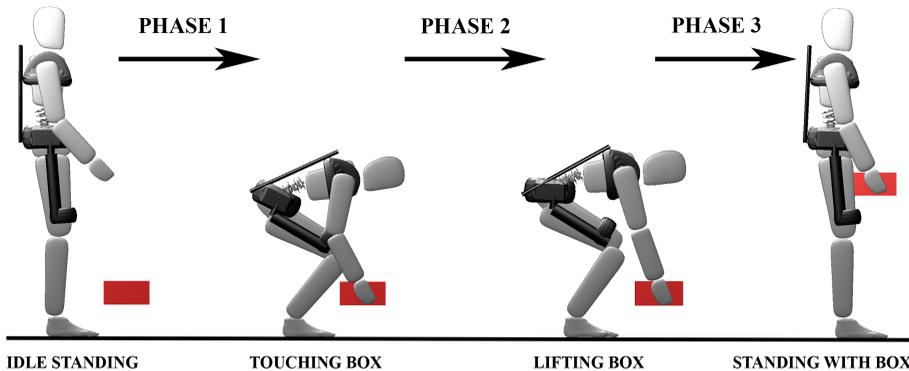


Figure 3. We formulate lifting as a three phase problem: standing to touching the box, touching the box to lifting the box and finally lifting the box to standing back up again with the box. Image sequence taken from the LSQ human-with-exoskeleton OCP.

2.5.1. Least-squares quadratic fitting (LSQ)

To find solutions that mimic the human participant's lifting technique we solve a least-squares problem. For both human-only and human-with-exoskeleton formulations, the least-squares problem has two

terms: a tracking term

$$\Phi_i(\mathbf{q}(\mathbf{t}), \mathbf{q}(t), \tau(t), \mathbf{u}(t)) = \sum_{m=0}^{M_i} \|\mathbf{q}^H(t_{i_m}) - \mathbf{q}^{REF}(t_{i_m})\|_2^2 \quad (16)$$

and a term

$$w_1 \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{ALL}\|_2^2 dt + w_2 \int_{t_i}^{t_{i+1}} (u^{motor})^2 dt \quad (17)$$

to ensure that the exoskeleton is used during the human-with-exoskeleton simulations. We include a small regularization on the exoskeleton's motor torque so that the exoskeleton is not unnecessarily used. M denotes the number of shooting nodes for the given phase i , and q^H and q^{REF} are the computed and tracked positional coordinates, respectively. The vector q^{REF} , is a function of time that comes from using inverse-kinematics to pose the model so that it's virtual markers minimize the squared distance to the recorded positions of the markers on the participant. The vector $\bar{\mathbf{u}}^{ALL}$ is the the normalized human joint torques vector, and u^{motor} is the control signal of the motor which is used as a regularization term. w_1 and w_2 have a value of 0.02 and 1×10^{-9} respectively.

2.5.2. Synthesizing lifting techniques with a lower risk of injury

We synthesize three lifting motions that minimize the risk factors associated with low-back injury: CLBL, PLBL, and a weighted sum of both CLBL and PLBL. When analyzing experimental data, the CLBL is calculated as

$$CLBL = \int_0^T \tau_{L5/S1} dt \quad (18)$$

as described by Coenen et al. 2013. Although equation 18 is perfectly suited for analysis, it is ill-suited as a cost function for an optimal control problem because it is signed: it is possible for the model to produce a flexion torque and thus reducing the CLBL after lifting. Instead, we integrate the normalized torque of the lower back squared

$$CLBL_{cost} = \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{lum}\|^2 dt. \quad (19)$$

Squaring the the lumbar torques has been suggested by Coenen et al. 2012 to put a bit more emphasis of the CLBL result on higher loads. We have also normalized these values according to the maximum torque output of these joints (τ_{max}) so that their value remains between 0 and 1, to avoid numerical scaling problems that occur with either very big or very small numbers. Since the motion of the 5 vertebrae are coupled by 4 constraint equations, it is possible to drive the lumbar spine using only a subset of the joints, but this is physiologically unrealistic. By summing across the moments developed by each joint, we ensure that the final load distribution does not favour one vertebra at the expense of the other joints.

When analyzing experimental data, the PLBL is evaluated as

$$\max(\tau_{L5/S1}(t)) \quad (20)$$

over a time duration of interest (Coenen et al. 2012). Both Coenen et al. and Jäger et al. 2013 have suggested instead to evaluate PLBL risk by integrating the L5/S1 moment over time but raised to a higher power to further penalize peak values. To find motions that reduce PLBL risk, we minimize the sum of normalized lumbar torques

$$PLBL_{cost} = \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{lum}\|^4 dt \quad (21)$$

raised to the power of 4.

Finally, we consider a third cost function which is simply the sum of these two cost functions

$$HYB_{cost} = \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{lum}\|_2^2 + \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{lum}\|_2^4 dt \quad (22)$$

in hopes of finding a motion that is able to reduce both risk factors simultaneously. In all cost functions we include a small regularization term that includes all joint torques

$$w \int_{t_i}^{t_{i+1}} \|\bar{\mathbf{u}}^{ALL}\|_2^2 dt \quad (23)$$

to ensure that the result is a minima (Nagarajan and Kolter, 2017). The weight factor, w takes the value of 10^{-3} .

2.6. Evaluation

We use the following procedure to evaluate our results:

- We compare the peak lumbar load and maximum lumbar flexion angles of our participant to the values reported in the literature (Kingma et al. 2004) where 10 participants performed a stoop-squat lift with a 10.5 kg box.
- We report CLBL and PLBL which we have calculated according to Coenen et al. (2013), for each of the prediction simulations and dynamic reconstruction problems.
- We report the results for the four study blocks: human-only with tracking (LSQ); human-only with improved lifting technique; human-with-exoskeleton with tracking; and human-with-exoskeleton with improved lifting technique.

3. Results

Simulated improvements to lifting technique were able to reduce the CLBL and PLBL risk factors for the unassisted lifts (Table 1, Figures 4, 5(A) and 6(A)). The experimental participant performed a stoop-squat lift with a peak torque of 210 Nm and a cumulative torque of 243 Nms (Table 1, Fig. 5) according to the dynamic reconstruction, close to the peak torque range reported by Kingma et al (2004) of 199 ± 12 Nm. These simulation results indicate that training can produce modest reductions in PLBL, and larger reductions in CLBL (Table 1 and grey bars in Fig. 4).

Table 1. CLBL and PLBL torques for both human-only and human-with-exoskeleton simulations for the 4 different OCPs. The LSQ entry is the reference used for comparison purposes, by tracking the motions of the experimental participant.

OCP	CLBL (Nms)		PLBL (Nm)	
	Human Only	Human with Exoskeleton	Human Only	Human with Exoskeleton
LSQ	243	217	210	177
<i>CLBL_{cost}</i>	130	121	195	165
<i>PLBL_{cost}</i>	210	193	176	138
<i>HYB_{cost}</i>	190	148	182	148

⁰Note that CLBL and PLBL have different units, as CLBL is torque as a function of time where PLBL is the torque at a specific point in time. All values rounded to 3 significant figures.

Larger reductions in both CLBL and PLBL can be observed in the human-with-exoskeleton OCPs. While it was not possible to reduce the PLBL in the human-only simulation by more than 16.2%, the exoskeleton was able to achieve a 34.3% reduction (Table 1 and white bars in Fig. 4) when looking at the $PLBL_{cost}$ metric. In addition, the exoskeleton was able to reduce further both CLBL and PLBL in all cases when compared to the human-only simulations (Fig. 6). While the overall trend in torques for the various solutions appears to be similar in both unaided and aided motions, phase 2 does not follow this pattern. The drop in torque during the human-only simulations at the end of phase 2 (Fig. 6) happens as a result of a rapid counter movement: just prior to lifting the box the model relaxes and drops the hips. During the exoskeleton assisted lifts, the model does not exploit this technique presumably because the exoskeleton's support makes this counter movement less effective.

The lumbar flexion angle closely tracked the participant data in the LSQ solution (Appendix B, Fig. 9) and was substantially reduced when the model was free to move. The dominant factor for the peak lumbar flexion angle appears to be the cost function as there is little difference between the lumbar flexion angles of the human-only and human-with-exoskeleton lifts. Curiously, all the minimization cost functions for the human-only condition result in a lower lumbar flexion angle in phases 1 and 2 (Fig. 7), whereas for the same phases in the human-with-exoskeleton condition, the exoskeleton seems to be increasing the lumbar flexion angle of the human. In addition, we can see that the $CLBL_{cost}$ results in the fastest lifts (Table 2), since cumulative load accumulates over time.

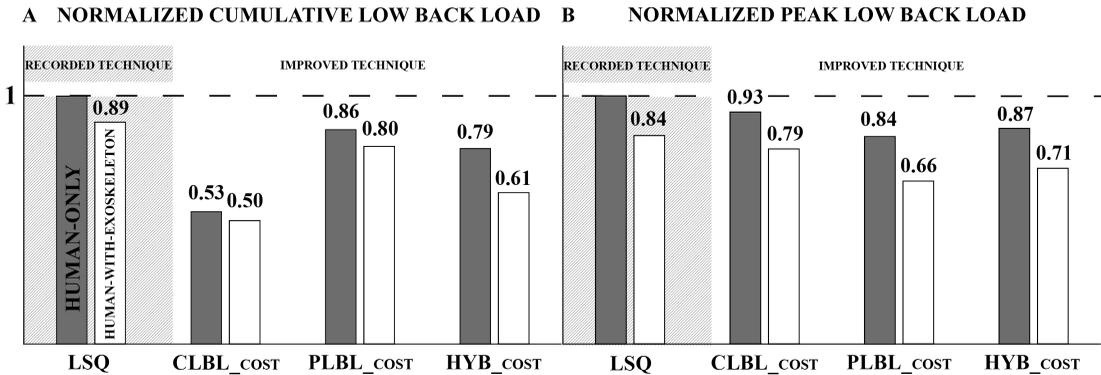


Figure 4. Bar plot representing normalized lumbar torques about the L5/S1 joint from simulations of (A) Cumulative low back loads and (B) Peak low back loads. Shaded bars refer to human-only and white bars to human-with-exoskeleton OCPs. The torques are normalized according to the L5/S1 joint torque from the result of the human-only tracking (LSQ) OCP. Numbers on top of bars indicate the value of the normalized torque, relative to the human-only LSQ of value 1.

Table 2. Phase durations (in seconds) for all three phases for all OCP formulations.

OCP	Human Only				Human with Exoskeleton			
	Phase 1 (s)	Phase 2 (s)	Phase 3 (s)	Total (s)	Phase 1 (s)	Phase 2 (s)	Phase 3 (s)	Total (s)
LSQ	1.34	0.12	1.42	2.88	1.34	0.12	1.42	2.88
$CLBL_{cost}$	1.21	0.14	1.00	2.35	1.60	0.14	1.06	2.80
$PLBL_{cost}$	1.22	0.14	1.19	2.55	1.60	0.14	1.31	3.04
HYB_{cost}	1.25	0.14	1.19	2.58	1.53	0.14	1.10	2.77

4. Discussion

The risk of low-back injury can be reduced by improving lifting technique and by using an exoskeleton (Toxiri et al., 2019). Two of the biomechanic metrics that have been associated with the risk of injury to the lower back are CLBL and PLBL. In this study, we used simulation to examine how effective training, and an exoskeleton, are at reducing the CLBL and PLBL during a stoop-squat lift of a 10 kg

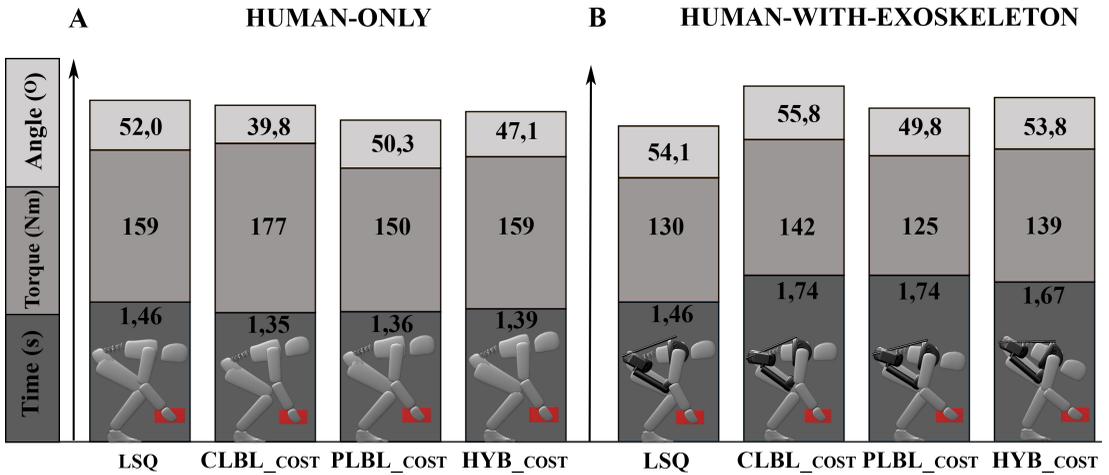


Figure 5. Models of (A) human-only and (B) human-with-exoskeleton at the moment of lifting the box for all objective functions. The shaded regions in the background resemble a stacked bar plot, indicating the time (s) of box lift-off with the respective peak torques (Nm) and lumbar flexion angles (°) achieved at the point of lifting the box, for every model separately, with all the values indicated in the respective boxes.

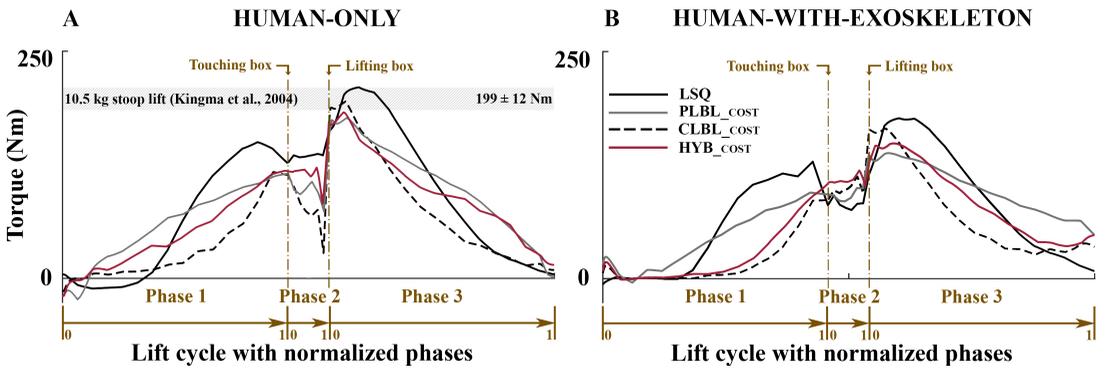


Figure 6. L5/S1 torques for (A) Human-only and (B) Human-with-exoskeleton as calculated for the biomechanic metrics of CLBL and PLBL. The shaded region in the human-only plot reports the values measured in literature (Kingma et al., 2004) for net lumbar torque. The phases of the minimization problems were scaled according to the experimental phases for easier graphical comparison.

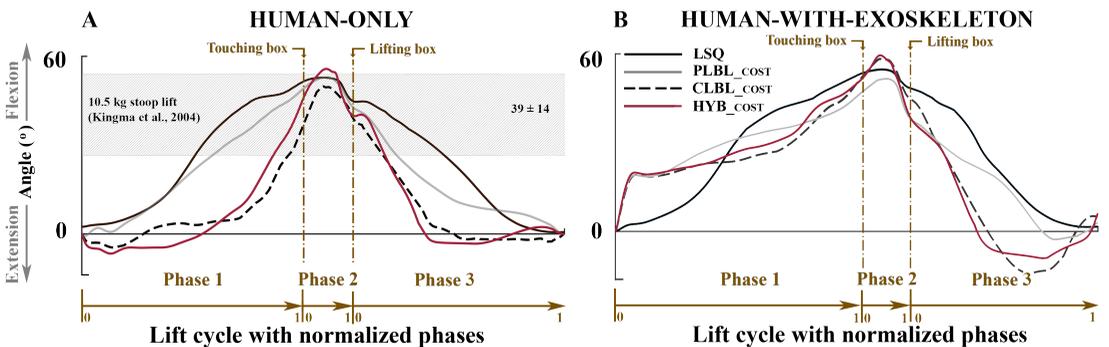


Figure 7. Lumbar flexion angles for (A) Human-only and (B) Human-with-exoskeleton as resulted from the tracked and optimized stoop-squat motion. The shaded region in the human-only plot reports the values measured in literature (Kingma et al., 2004) for net flexion angle. The phases of the minimization problems were scaled according to the experimental phases for easier graphical comparison.

box. We then compare the contributions of the improved technique alone, and with the exoskeleton assistance, to the human-only reference motion that we have reconstructed from motion capture data.

The cost functions we use do not only change the motion of the human in order to decrease the risk of injury, but they affect the way the exoskeleton supports the human as well, in order to help decrease the risk of injury.

We have had to make simplifications to our model because the human body, the exoskeleton, and the interaction of two, are complex. We have ignored the effects of muscles and muscle dynamics. This simplification is reasonable under the assumption that the human is performing a sub-maximal lift and is not at the limits of the participant's flexibility, force or speed. By creating three hypothetical lifting techniques using $CLBL_{cost}$, $PLBL_{cost}$, and HYB_{cost} we assume that humans can actually be trained to minimize these risk factors. We have also included limits on the interaction forces (Appendix A, 8) under the assumption that the exoskeleton is comfortable to use if these limits are met. While we have imposed human-exoskeleton interaction force limits (see Appendix A) it remains unclear how interaction forces will affect the motion of the human.

The human-only L5/S1 peak moments compare well (176 - 210 Nm) to the ones reported by Kingma et al. 2004 (187 - 211 Nm) (Fig. 6(A)), as well as the peak lumbar flexion angles (Fig. 7). In a study by Lavender et al. (2002), 265 participants were trained to perform a lift of a 12 to 13 kg box to improve their lifting technique. The peak moment varied from 225 Nm to 178 Nm throughout the training period. In relation to our human-only simulation of lowering the PLBL, we can see that this reduction is similar to the reduction in PLBL in our $PLBL_{cost}$ human-only simulations as the human-only reference motion has a PLBL of 210 Nm and $PLBL_{cost}$ human-only OCP minimizes this to 176 Nm. De Looze (2016) et al. reports similar peak moment reductions of 19.5% and 15% when participants use the PLAD (Abdoli et al. 2006) and BNDR (Wehnder et al. 2010) exoskeletons. In contrast, Koopman et al. (2020a) reports a 5 to 10% reduction in peak moments when using the Laevo exoskeleton. In the context of active back-support exoskeletons, the XoTrunk exoskeleton (Lazzaroni et al. 2020) achieves a peak moment reduction of 17%. The passive SPEXOR exoskeleton, produced a maximum of $23 \pm 3\%$ reduction in the peak L5/S1 extension moment (Koopman et al., 2020b) for ten subjects using different lifting techniques, including exoskeleton assistance. Using our simulations based on the active SPEXOR exoskeleton, we predict a reduction of 21.4% (according to the CLBL cost function) to 34.3% (according to the PLBL cost function).

5. Conclusion

Our simulations indicate that improving the lifting technique alone can reduce the CLBL from 243 to 130 Nms, but only modestly reduces the PLBL from 210 to 176 Nm. When the SPEXOR exoskeleton is used without any alteration to the person's lifting technique the CLBL is reduced from 243 to 217 Nms, while the PLBL is reduced from 210 to 177 Nm. The biggest reduction in both CLBL and PLBL are realized when both the SPEXOR exoskeleton and improved lifting technique are used together where the CLBL is reduced to 121 Nms and the PLBL to 138 Nm. While all of the three cost functions we examined reduced the risk factors for back injury, the HYB cost function offered the most balanced reduction of both the CLBL (38.3%) and the PLBL (28.6%). Thus, improvements to lifting technique alone may be a suitable intervention for people who infrequently lift light loads. However, in more demanding tasks, an exoskeleton should be considered since it is more effective than the technique alone at reducing both the cumulative and peak loads experienced by the low back.

Acknowledgments. We would like to thank Žiga Kozinc and Borut Fonda at the University of Primorska for their help collecting the experimental data used in this work. We also thank the Simulation and Optimization Research Group of the IWR at Heidelberg University for allowing us to work with the optimal control code MUSCOD-II.

Funding statement. Financial support provided by the European Commission within the H2020 project SPEXOR (Project ID 687662), from project HeiAge funded by the Carl Zeiss-foundation (Germany) and from the Canada Excellence Research Chair Tri-Agency program is gratefully acknowledged.

Ethical standards. The authors assert that all procedures contributing to this work comply with the ethical standards of the relevant national and institutional committees on human experimentation and with the Helsinki Declaration of 1975, as revised

in 2008. The authors assert that the experimental recordings were approved by the national medical ethics committee of the Republic of Slovenia (0120-199/2016-2, KME 93/04/16).

Author contributions. GM and MM undertook the research and the manuscript preparation. NS designed and undertook the experimental work. KM conceived of the research idea and plan, obtained funding for the project, assisted in the work, and in the preparation of the manuscript.

Data Availability. The data that support the findings of this study are available from the corresponding author, GM, upon reasonable request.

Conflicts of Interest. None.

References

- Abdoli-E, M., Agnew, M. J., and Stevenson, J. M. (2006). An on-body personal lift augmentation device (PLAD) reduces EMG amplitude of erector spinae during lifting tasks. *Clinical Biomechanics*, 21(5):456–465.
- Baumgarte, J. (1972). Stabilization of constraints and integrals of motion in dynamical systems. *Computer Methods in Applied Mechanics and Engineering*, 1(1):1–16.
- Bock, H. G. and Plitt, K. J. (1985). Multiple Shooting Algorithm for Direct Solution of Optimal Control Problems. *IFAC Proceedings Series*, 17(2):1603–1608.
- Brereton, L. C. and McGill, S. M. (1999). Effects of physical fatigue and cognitive challenges on the potential for low back injury. *Human Movement Science*, 18(6):839–857.
- Buchbinder, R., Blyth, F. M., March, L. M., Brooks, P., Woolf, A. D., and Hoy, D. G. (2013). Placing the global burden of low back pain in context. *Best Practice and Research: Clinical Rheumatology*, 27(5):575–589.
- Burgess-Limerick, R., Abernethy, B., Neal, R. J., and Kippers, V. (1995). Self-selected manual lifting technique: Functional consequences of the interjoint coordination. *Human Factors*, 37(2):395–411.
- Christophy, M., Senan, N. A. F., Lotz, J. C., and O'Reilly, O. M. (2012). A Musculoskeletal model for the lumbar spine. *Biomechanics and Modeling in Mechanobiology*, 11(1-2):19–34.
- Coenen, P., Kingma, I., Boot, C. R., Bongers, P. M., and Van Dieën, J. H. (2012). The contribution of load magnitude and number of load cycles to cumulative low-back load estimations: A study based on in-vitro compression data. *Clinical Biomechanics*, 27(10):1083–1086.
- Coenen, P., Kingma, I., Boot, C. R., Bongers, P. M., and Van Dieën, J. H. (2014). Cumulative mechanical low-back load at work is a determinant of low-back pain. *Occupational and Environmental Medicine*, 71(5):332–337.
- Coenen, P., Kingma, I., Boot, C. R., Twisk, J. W., Bongers, P. M., and Van Dieën, J. H. (2013). Cumulative Low Back Load at Work as a Risk Factor of Low Back Pain: A Prospective Cohort Study. *Journal of Occupational Rehabilitation*, 23(1):11–18.
- de Looze, M. P., Bosch, T., Krause, F., Stadler, K. S., and O'Sullivan, L. W. (2016). Exoskeletons for industrial application and their potential effects on physical work load. *Ergonomics*, 59(5):671–681.
- de Zee, M., Hansen, L., Wong, C., Rasmussen, J., and Simonsen, E. B. (2007). A generic detailed rigid-body lumbar spine model. *Journal of Biomechanics*, 40(6):1219–1227.
- Felis, M. L. (2017). RBDL: an efficient rigid-body dynamics library using recursive algorithms. *Autonomous Robots*, 41(2):495–511.
- Harant, M., Millard, M., Sarabon, N., and Mombaur, K. (2019). Cost function evaluation for optimizing design and actuation of an active exoskeleton to ergonomically assist lifting motions. *IEEE-RAS International Conference on Humanoid Robots*, 2019-October:186–193.
- Hensel, R. and Keil, M. (2019). Subjective Evaluation of a Passive Industrial Exoskeleton for Lower-back Support: A Field Study in the Automotive Sector. *IIEE Transactions on Occupational Ergonomics and Human Factors*, 7(3-4):213–221.
- Huysamen, K., de Looze, M., Bosch, T., Ortiz, J., Toxiri, S., and O'Sullivan, L. W. (2018). Assessment of an active industrial exoskeleton to aid dynamic lifting and lowering manual handling tasks. *Applied Ergonomics*, 68(April 2017):125–131.
- Jäger, M., Jordan, C., Theilmeyer, A., Wortmann, N., Kuhn, S., Nienhaus, A., and Luttmann, A. (2013). Lumbar-load analysis of manual patient-handling activities for biomechanical overload prevention among healthcare workers. *Annals of Occupational Hygiene*, 57(4):528–544.
- John C. Holladay (1957). A Smoothest Curve Approximation. *American Mathematical Society: Mathematical Tables and Other Aids to Computation*, 11(60):233–243.
- Kazerouni, H., Tung, W., and Pillai, M. (2019). Evaluation of Trunk-Supporting Exoskeleton. *Proceedings of the Human Factors and Ergonomics Society Annual Meeting*, 63(1):1080–1083.
- Kingma, I., Bosch, T., Bruins, L., and van Dieën, J. H. (2004). Foot positioning instruction, initial vertical load position and lifting technique: Effects on low back loading. *Ergonomics*, 47(13):1365–1385.
- Koopman, A. S., Kingma, I., de Looze, M. P., and van Dieën, J. H. (2020a). Effects of a passive back exoskeleton on the mechanical loading of the low-back during symmetric lifting. *Journal of Biomechanics*, 102:109486.
- Koopman, A. S., Näf, M., Baltrusch, S. J., Kingma, I., Rodríguez-Guerrero, C., Babič, J., de Looze, M. P., and van Dieën, J. H. (2020b). Biomechanical evaluation of a new passive back support exoskeleton. *Journal of Biomechanics*, 105.
- Laevo, B. V. (2018). Product Information - What is the Laevo and How Does It Work?

- Lavender, S. A., Lorenz, E., and Andersson, G. B. (2002). Training in Lifting. *Professional Safety*, (December):30–35.
- Lazzaroni, M., Tabasi, A., Toxiri, S., Caldwell, D. G., De Momi, E., van Dijk, W., de Looze, M. P., Kingma, I., van Dieën, J. H., and Ortiz, J. (2020). Evaluation of an acceleration-based assistive strategy to control a back-support exoskeleton for manual material handling. *Wearable Technologies*, 1(May):1–16.
- Leineweber, D. B., Bauer, I., Bock, H. G., and Schlöder, J. P. (2003). An efficient multiple shooting based reduced SQP strategy for large-scale dynamic process optimization. Part I: Theoretical aspects. *Computers and Chemical Engineering*, 27(2):157–166.
- Leva, P. d. (1996). Adjustments to Zatsiorsky-Seluyanov's segment inertia parameters. *J. Biomechanics*, 30(28)(July):1–17.
- Luo, Z. and Yu, Y. (2013). Wearable stooping-assist device in reducing risk of low back disorders during stooped work. *2013 IEEE International Conference on Mechatronics and Automation, IEEE ICMA 2013*, (Ld):230–236.
- M J Pearcy, N. B. (1988). Instantaneous axes of rotation of the lumbar intervertebral joints. *Medicine, Geology Spine*.
- Marinou, G. D. and Mombaur, K. D. (2020). Optimizing active spinal exoskeletons to minimize low back loads. In *Proceedings of the 5th International Symposium on Wearable Robotics*. Springer.
- McGill, Stuart M; Norman, R. W. (1987). Effects of an anatomically detailed erector spinae model on L4L5 disc compression and shear. *Journal of Biomechanics*, 20(6):591–600.
- Millard, M., Sreenivasa, M., and Mombaur, K. (2017). Predicting the motions and forces of wearable robotic systems using optimal control. *Frontiers Robotics AI*, 4(AUG):1–12.
- Mitsuhashi, N., Fujieda, K., Tamura, T., Kawamoto, S., Takagi, T., and Okubo, K. (2009). BodyParts3D: 3D structure database for anatomical concepts. *Nucleic Acids Research*, 37(SUPPL. 1):782–785.
- Muramatsu, Y. and Kobayashi, H. (2014). Assessment of local muscle fatigue by NIRS - development and evaluation of muscle suit -. *ROBOMECH Journal*, 1(1):1–11.
- Näf, M. B., Koopman, A. S., Baltrusch, S., Rodriguez-Guerrero, C., Vanderborght, B., and Lefeber, D. (2018). Passive back support exoskeleton improves range of motion using flexible beams. *Frontiers Robotics AI*, 5(JUN):1–16.
- Nagarajan, V. and Kolter, J. Z. (2017). Gradient descent GAN optimization is locally stable. *Advances in Neural Information Processing Systems*, 2017-Decem(Nips):5586–5596.
- Toxiri, S., Koopman, A. S., Lazzaroni, M., Ortiz, J., Power, V., de Looze, M. P., O'Sullivan, L., and Caldwell, D. G. (2018). Rationale, implementation and evaluation of assistive strategies for an active back-support exoskeleton. *Frontiers Robotics AI*, 5(MAY):1–14.
- Toxiri, S., Näf, M. B., Lazzaroni, M., Fernández, J., Sposito, M., Poliero, T., Monica, L., Anastasi, S., Caldwell, D. G., and Ortiz, J. (2019). Back-Support Exoskeletons for Occupational Use: An Overview of Technological Advances and Trends. *IIEE Transactions on Occupational Ergonomics and Human Factors*, 7(3-4):237–249.
- Ulrey, B. L. and Fathallah, F. A. (2013). Effect of a personal weight transfer device on muscle activities and joint flexions in the stooped posture. *J. Electromyogr: Kinesiol.*, 195–205.:195–205.
- van Dieën, J. H. (2005). Effects of antagonistic co-contraction on differences between electromyography based and optimization based estimates of spinal forces. *Ergonomics*, 48(4):411–426.
- Wehner, M., Rempel, D., and Kazerooni, H. (2010). Lower extremity exoskeleton reduces back forces in lifting. *Proceedings of the ASME Dynamic Systems and Control Conference 2009, DSCC2009*, (PART B):961–968.
- Wong, K. W., Luk, K. D., Leong, J. C., Wong, S. F., and Wong, K. K. (2006). Continuous dynamic spinal motion analysis. *Spine*, 31(4):414–419.
- Wynne-Jones, G., Cowen, J., Jordan, J. L., Uthman, O., Main, C. J., Glozier, N., and Van Der Windt, D. (2014). Absence from work and return to work in people with back pain: A systematic review and meta-analysis. *Occupational and Environmental Medicine*, 71(6):448–458.
- Xiang, Y. and Arefeen, A. (2020). Two-dimensional team lifting prediction with floating-base box dynamics and grasping force coupling. *Multibody System Dynamics*, 50(2):211–231.

A. Interaction Forces

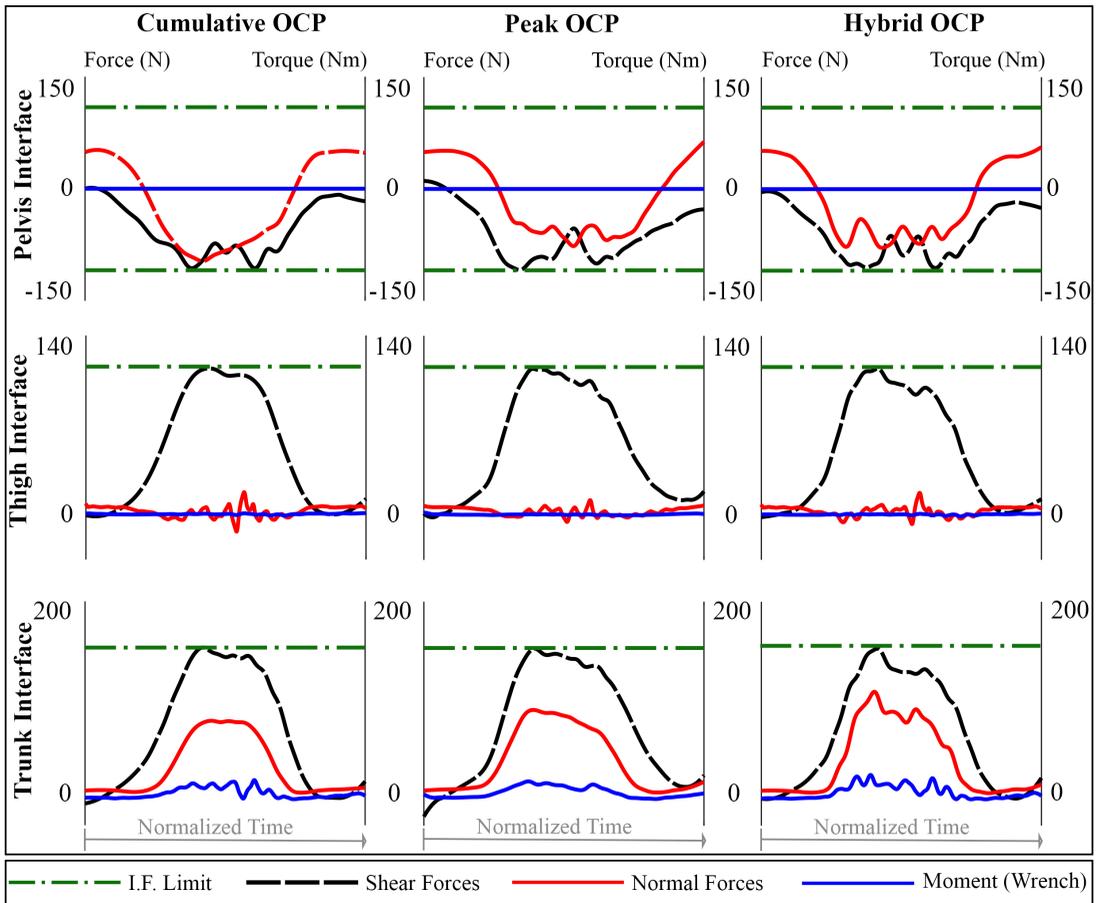


Figure 8. Interaction forces for human-with-exoskeleton prediction OCPs. Values shown correspond to normal and shear forces, and for moments about the three attachment points: pelvis, torso and thigh. Interaction force limits are also reported .

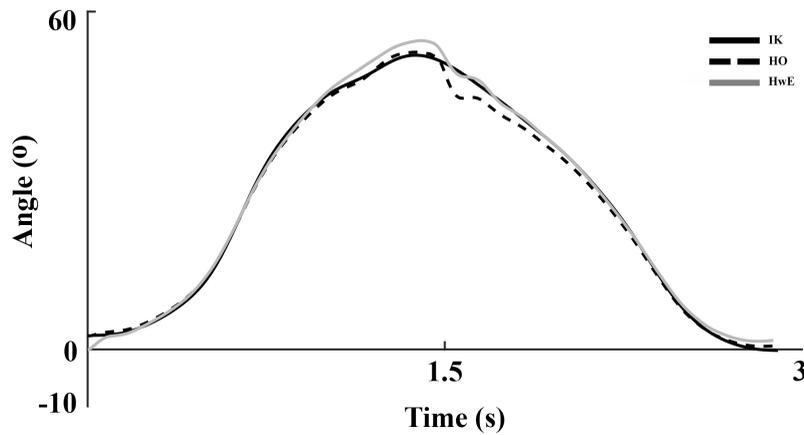
B. LSQ Validation

Figure 9. Lumbar flexion angles for the inverse kinematics (IK) solution obtained from motion capture vs. human-only (HO) LSQ OCP and human-with-exoskeleton (HwE) solutions from our OCPs. This serves as a validation of our dynamicreconstruction procedure, as to show the close correlation between our solution and the inverse kinematics data from the motion capture..